


ELEVATION OF PARAPET


NOTES

WHEN PARAPETS ARE POURED CONTINUOUSLY FROM END TO END, THEY SHALL BE SEPARATED AT THE DEFLECTION JOINTS BY A PIECE OF 3 mm ZINC OR ALUMINUM PLATE CUT AS SHOWN IN SECTION 'B' BY SHADED AREA. IF CONSTRUCTION JOINTS IN PARAPETS ARE USED AT THE DEFLECTION JOINTS, ONE SIDE OF JOINT SHALL BE COATED WITH BITUMINOUS PAINT AND PLATE SEPARATORS MAY BE OMITTED.

☑ HORIZ. CONST. JOINT-STRIKE OFF AS SHOWN AND LEAVE ROUGH.

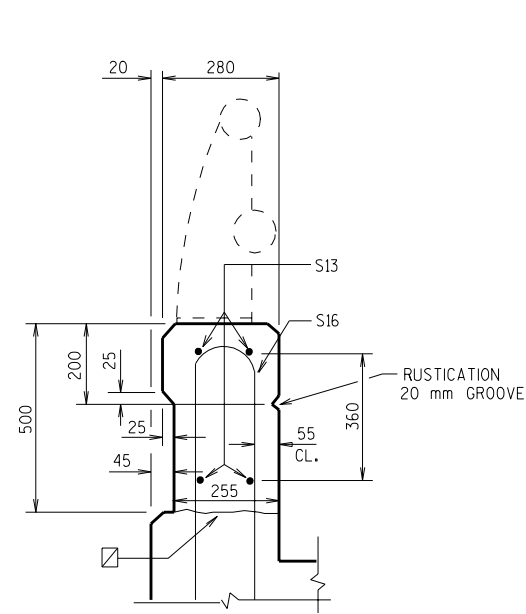


SECTION A

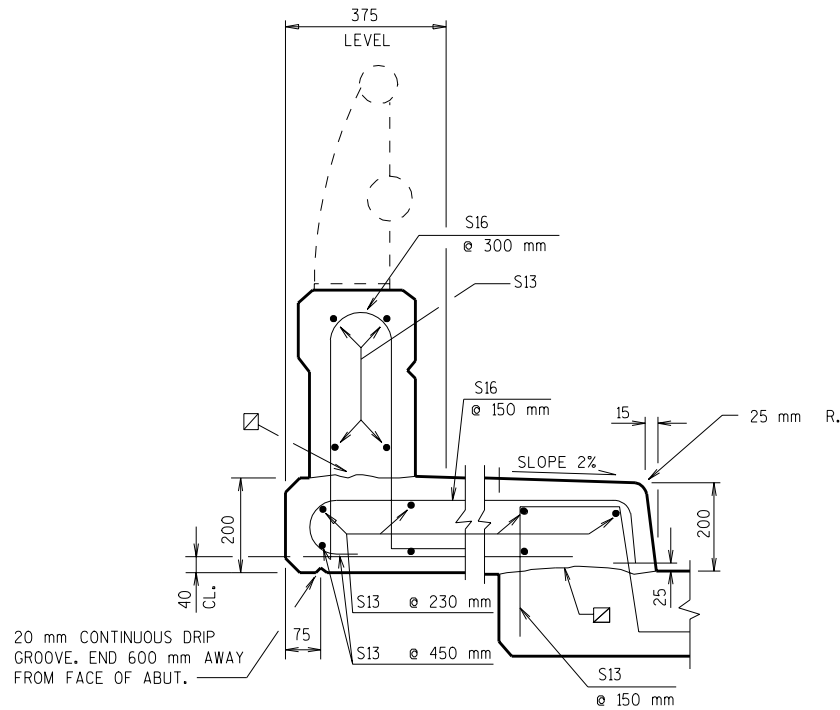

AT SIDEWALK


DETAILS OF DEFLECTION JOINTS IN PARAPET ONLY - SIMILAR TO THAT SHOWN IN THIS AREA

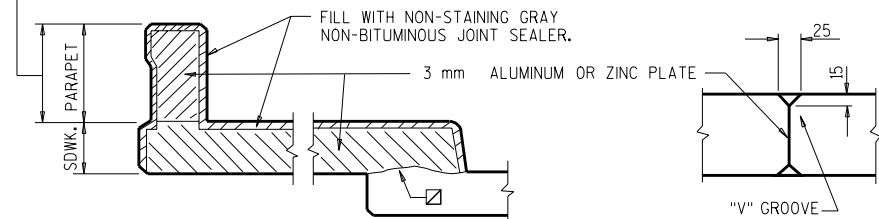

SECTION B

(SHOWING DEFLECTION JOINT IN SIDEWALK AND PARAPET.)

SECTION C

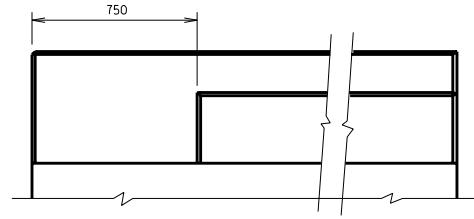

OUTSIDE FACE OF PARAPET

NO.	DATE	REVISION	BY
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION STRUCTURES DESIGN SECTION			
STRUCTURE			
CONST. SPEC.	1996	DRAWN BY	PLANS CK'D.
VERTICAL FACE PARAPET "A"			SHEET